

Flanges for graduations

for IZN.381 control knobs

MATERIAL

Matte anodised aluminium.

MOUNTING


By means of three supplied self-tapping rivets for fitting to control knobs IZN.381.

STANDARD EXECUTIONS

- **F.N:** plain flange.
- **F.K:** flange with triangular black index.
- **F.GS:** flange with black graduation (marks and numbers).
 - **F.32 GS e F.40 GS:** 40 marks, numbering 0, 1, 2 9 increases as the knob is turned clockwise.
 - **F.45, 50, 63 GS:** 100 marks, numbering 0, 1, 2 9 increases as the knob is turned clockwise.

SPECIAL EXECUTIONS ON REQUEST

On the surface of the flanges other kinds of precision graduations can be laser-engraved (see Graduations), numbers, graphic symbols, etc.

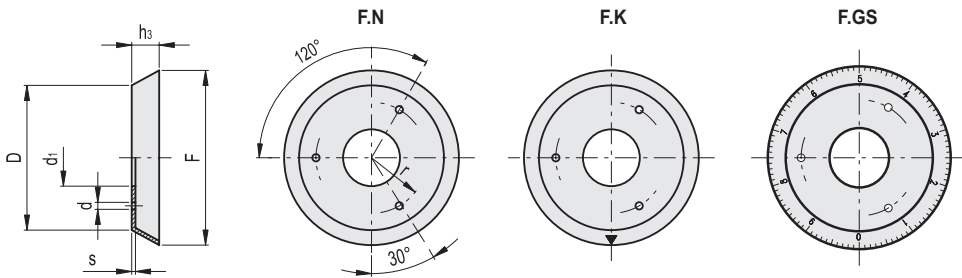

F.N

Code	Description	D	F	d	di	h3	s	r	⚖
29002	F.32 N	32	38	2.1	15	6	0.8	9.5	3
30102	F.40 N	42	50	3	18	7	1	14	7
30202	F.45 N	48	55	2.7	22	7	1	15.8	8
30302	F.50 N	52	63	2.7	22	9	1	18.1	10
30452	F.63 N	63	78	2.7	26	13	1	22.7	16

F.K

Code	Description	D	F	d	di	h3	s	r	⚖
29004	F.32 K	32	38	2.1	15	6	0.8	9.5	3
30104	F.40 K	42	50	3	18	7	1	14	7
30204	F.45 K	48	55	2.7	22	7	1	15.8	8
30304	F.50 K	52	63	2.7	22	9	1	18.1	10
30454	F.63 K	63	78	2.7	26	13	1	22.7	16

F.GS

Code	Description	D	F	d	di	h3	s	r	⚖
29003	F.32 GS-10/40	32	38	2.1	15	6	0.8	9.5	3
30103	F.40 GS-10/40	42	50	3	18	7	1	14	7
30203	F.45 GS-10/100	48	55	2.7	22	7	1	15.8	8
30303	F.50 GS-10/100	52	63	2.7	22	9	1	18.1	10
30453	F.63 GS-10/100	63	78	2.7	26	13	1	22.7	16