

GN 43-rectangular shape



Leveling Feet

Stainless Steel, with Fixing Lug, Rectangular Shape

SPECIFICATION

Types (Base)

- Type **E0**: Without rubber pad, with one slotted hole
- Type **E3**: With rubber pad, vulcanized, black, with one slotted hole
- Type **G0**: Without rubber pad, with 2 slotted holes
- Type **G3**: With rubber pad, vulcanized, black, with 2 slotted holes

Version (Screw)

- Version **S**: Without nut, external hex at the bottom
- Version **SK**: With nut, external hex at the bottom
- Version **T**: Without nut, wrench flat at the bottom
- Version **TK**: With nut, wrench flat at the bottom
- Version **U**: Without nut, hex socket at the top, wrench flat at the bottom
- Version **UK**: With nut, hex socket at the top, wrench flat at the bottom
- Version **V**: Without nut, external hex at the top and wrench flat at the bottom
- Version **VK**: With nut, external hex at the top and wrench flat at the bottom
- Version **W**: With adjustable sleeve, covered thread, wrench flat at the bottom
- Version **X**: External hex with internal thread

Base plate, plain ground
Stainless steel AISI 304

Threaded stem
Stainless steel AISI 303

Hex nut ISO 4032

Stainless steel

Rubber pad, vulcanized

- Black, NBR (Perbunan®)
- 70 ± 5 Shore A

INFORMATION

Leveling feet GN 43 are for use in aggressive environments. The range of combinations of base plates and adjustable spindle versions allows these leveling feet to be used in every situation.

The leveling feet can be screwed to the mounting surface use the fixing lug, which prevents lateral shifting. Moreover, the types with the rubber pad protect sensitive surfaces.

The leveling feet are supplied fully assembled and are not removable.

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)



LOAD RATING OF LEVELING FEET


The static load bearing capacity given in the table rests on a test series in which the load has been applied perpendicular to the base plate (without rubber underlay). For the values given in the table, the strain relief may result in minor deformations of the base plate.

Bending and buckling stress which often occurs in practice results in a lower load bearing capacity of the adjustment spindle and may have to be taken into account.


Also, the spindle strength is assumed to be ≥ 500 N/mm².

The details given on strength are nonbinding guide values without any liability. In general, they do not constitute a warranty of quality.


The user must determine from case to case if a product is suitable for the intended purpose or use. Environmental factors may influence the stated values.

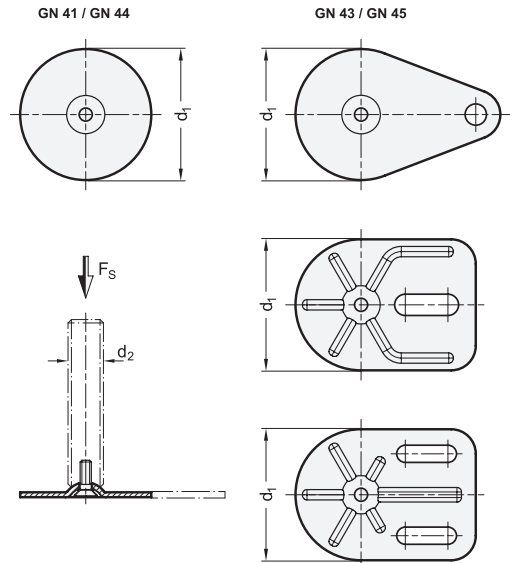


Versions of threaded stem		
<p>S / SK: External hex at the bottom at d_2 M 8, M 10, M 12</p>	<p>T / TK: Wrench flat at the bottom at d_2 M 16, M 20, M 24</p>	<p>U / UK: Hex socket at the top and wrench flat at the bottom at d_2 M 16, M 20, M 24</p>
<p>V / VK: External hex at the top and wrench flat at the bottom at d_2 M 16</p>	<p>W: Covered thread and wrench flat at the bottom at d_2 M 16</p>	<p>X: External hex with internal thread at d_2 M 8, M 10, M 12, M 16, M 20</p>

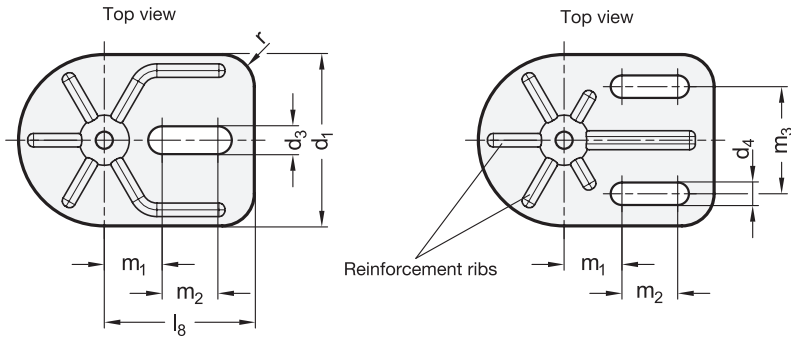


Type E0





Type G0










Type E3



Type G3

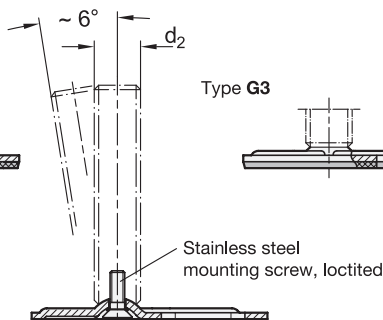

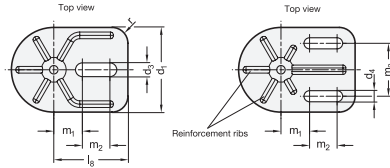

* Complete with version of the Leveling feet (External hex at the bottom)


S without nut **SK** with nut

GN 43-S/SK

Description	d1	d2	l1	l8	r	d3	d4	h1	h2	h3	h6	m1	m2	m3	A/F 1	Static Load in kN	⚖️
GN 43-80-M8-40-E0-*	80	M 8	40	70	15	13	-	3	1.3	12	-	27	26	-	17	8	199
GN 43-80-M8-40-E3-*	80	M 8	40	70	15	13	-	3	1.3	12	3	27	26	-	17	8	222
GN 43-80-M8-40-G0-*	80	M 8	40	70	15	-	10.5	3	1.3	12	-	27	26	50	17	8	192
GN 43-80-M8-40-G3-*	80	M 8	40	70	15	-	10.5	3	1.3	12	3	27	26	50	17	8	217
GN 43-80-M8-50-E0-*	80	M 8	50	70	15	13	-	3	1.3	12	-	27	26	-	17	8	202
GN 43-80-M8-50-E3-*	80	M 8	50	70	15	13	-	3	1.3	12	3	27	26	-	17	8	226
GN 43-80-M8-50-G0-*	80	M 8	50	70	15	-	10.5	3	1.3	12	-	27	26	50	17	8	196
GN 43-80-M8-50-G3-*	80	M 8	50	70	15	-	10.5	3	1.3	12	3	27	26	50	17	8	220
GN 43-80-M8-63-E0-*	80	M 8	63	70	15	13	-	3	1.3	12	-	27	26	-	17	8	206
GN 43-80-M8-63-E3-*	80	M 8	63	70	15	13	-	3	1.3	12	3	27	26	-	17	8	230
GN 43-80-M8-63-G0-*	80	M 8	63	70	15	-	10.5	3	1.3	12	-	27	26	50	17	8	200
GN 43-80-M8-63-G3-*	80	M 8	63	70	15	-	10.5	3	1.3	12	3	27	26	50	17	8	224
GN 43-80-M10-50-E0-*	80	M 10	50	70	15	13	-	3	1.3	12	-	27	26	-	17	14	232
GN 43-80-M10-50-E3-*	80	M 10	50	70	15	13	-	3	1.3	12	3	27	26	-	17	14	255
GN 43-80-M10-50-G0-*	80	M 10	50	70	15	-	10.5	3	1.3	12	-	27	26	50	17	14	205
GN 43-80-M10-50-G3-*	80	M 10	50	70	15	-	10.5	3	1.3	12	3	27	26	50	17	14	250
GN 43-80-M10-60-E0-*	80	M 10	60	70	15	13	-	3	1.3	12	-	27	26	-	17	14	236
GN 43-80-M10-60-E3-*	80	M 10	60	70	15	13	-	3	1.3	12	3	27	26	-	17	14	259
GN 43-80-M10-60-G0-*	80	M 10	60	70	15	-	10.5	3	1.3	12	-	27	26	50	17	14	229
GN 43-80-M10-60-G3-*	80	M 10	60	70	15	-	10.5	3	1.3	12	3	27	26	50	17	14	254
GN 43-80-M10-80-E0-*	80	M 10	80	70	15	13	-	3	1.3	12	-	27	26	-	17	14	246
GN 43-80-M10-80-E3-*	80	M 10	80	70	15	13	-	3	1.3	12	3	27	26	-	17	14	269
GN 43-80-M10-80-G0-*	80	M 10	80	70	15	-	10.5	3	1.3	12	-	27	26	50	17	14	264
GN 43-80-M10-80-G3-*	80	M 10	80	70	15	-	10.5	3	1.3	12	3	27	26	50	17	14	264
GN 43-80-M10-100-E0-*	80	M 10	100	70	15	13	-	3	1.3	12	-	27	26	-	17	14	257
GN 43-80-M10-100-E3-*	80	M 10	100	70	15	13	-	3	1.3	12	3	27	26	-	17	14	280
GN 43-80-M10-100-G0-*	80	M 10	100	70	15	-	10.5	3	1.3	12	-	27	26	50	17	14	250
GN 43-80-M10-100-G3-*	80	M 10	100	70	15	-	10.5	3	1.3	12	3	27	26	50	17	14	275
GN 43-80-M12-80-E3-*	80	M 12	60	70	15	13	-	3	1.3	12	-	27	26	-	17	20	246
GN 43-80-M12-60-E3-*	80	M 12	60	70	15	13	-	3	1.3	12	3	27	26	-	17	20	276
GN 43-80-M12-60-G0-*	80	M 12	60	70	15	-	10.5	3	1.3	12	-	27	26	50	17	20	241
GN 43-80-M12-60-G3-*	80	M 12	60	70	15	-	10.5	3	1.3	12	3	27	26	50	17	20	268
GN 43-80-M12-80-E0-*	80	M 12	80	70	15	13	-	3	1.3	12	-	27	26	-	17	20	260
GN 43-80-M12-80-E3-*	80	M 12	80	70	15	13	-	3	1.3	12	3	27	26	-	17	20	290
GN 43-80-M12-80-G0-*	80	M 12	80	70	15	-	10.5	3	1.3	12	-	27	26	50	17	20	255
GN 43-80-M12-80-G3-*	80	M 12	80	70	15	-	10.5	3	1.3	12	3	27	26	50	17	20	282
GN 43-80-M12-100-E0-*	80	M 12	100	70	15	13	-	3	1.3	12	-	27	26	-	17	20	275
GN 43-80-M12-100-E3-*	80	M 12	100	70	15	13	-	3	1.3	12	3	27	26	-	17	20	305
GN 43-80-M12-100-G0-*	80	M 12	100	70	15	-	10.5	3	1.3	12	-	27	26	50	17	20	270
GN 43-80-M12-100-G3-*	80	M 12	100	70	15	-	10.5	3	1.3	12	3	27	26	50	17	20	297
GN 43-80-M12-125-E0-*	80	M 12	125	70	15	13	-	3	1.3	12	-	27	26	-	17	20	292
GN 43-80-M12-125-E3-*	80	M 12	125	70	15	13	-	3	1.3	12	3	27	26	-	17	20	322
GN 43-80-M12-125-G0-*	80	M 12	125	70	15	-	10.5	3	1.3	12	-	27	26	50	17	20	287
GN 43-80-M12-125-G3-*	80	M 12	125	70	15	-	10.5	3	1.3	12	3	27	26	50	17	20	314

Weight Version S

Leveling elements 11

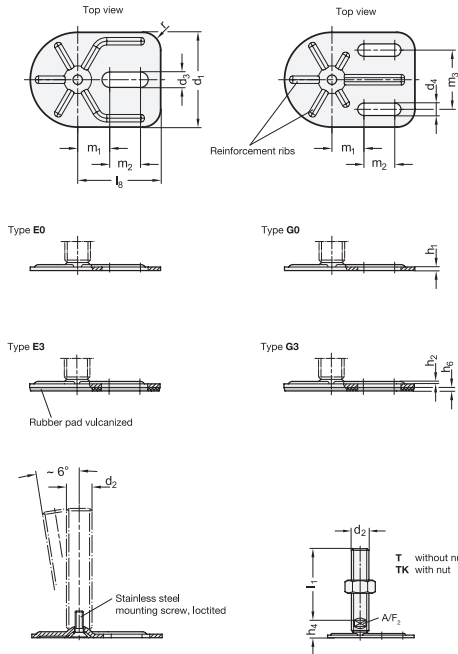

* Complete with version of the Leveling feet (Wrench flat at the bottom)


T without nut
TK with nut

GN 43-T/TK


Description	d1	d2	l1	l8	r	d3	d4	h1	h2	h4	h6	m1	m2	m3	A/F 2	Static Load in kN	⚖️
GN 43-80-M16-75-E0-*	80	M 16	75	70	15	13	-	3	1.3	18	-	27	26	-	12	20	284
GN 43-80-M16-75-E3-*	80	M 16	75	70	15	13	-	3	1.3	18	3	27	26	-	12	20	314
GN 43-80-M16-75-G0-*	80	M 16	75	70	15	-	10.5	3	1.3	18	-	27	26	50	12	20	279
GN 43-80-M16-75-G3-*	80	M 16	75	70	15	-	10.5	3	1.3	18	3	27	26	50	12	20	306
GN 43-80-M16-100-E0-*	80	M 16	100	70	15	13	-	3	1.3	18	-	27	26	-	12	20	317
GN 43-80-M16-100-E3-*	80	M 16	100	70	15	13	-	3	1.3	18	3	27	26	-	12	20	347
GN 43-80-M16-100-G0-*	80	M 16	100	70	15	-	10.5	3	1.3	18	-	27	26	50	12	20	312
GN 43-80-M16-100-G3-*	80	M 16	100	70	15	-	10.5	3	1.3	18	3	27	26	50	12	20	339
GN 43-80-M16-125-E0-*	80	M 16	125	70	15	13	-	3	1.3	18	-	27	26	-	12	20	349
GN 43-80-M16-125-E3-*	80	M 16	125	70	15	13	-	3	1.3	18	3	27	26	-	12	20	379
GN 43-80-M16-125-G0-*	80	M 16	125	70	15	-	10.5	3	1.3	18	-	27	26	50	12	20	344
GN 43-80-M16-125-G3-*	80	M 16	125	70	15	-	10.5	3	1.3	18	3	27	26	50	12	20	371
GN 43-80-M16-150-E0-*	80	M 16	150	70	15	13	-	3	1.3	18	-	27	26	-	12	20	381
GN 43-80-M16-150-E3-*	80	M 16	150	70	15	13	-	3	1.3	18	3	27	26	-	12	20	420
GN 43-80-M16-150-G0-*	80	M 16	150	70	15	-	10.5	3	1.3	18	-	27	26	50	12	20	376
GN 43-80-M16-150-G3-*	80	M 16	150	70	15	-	10.5	3	1.3	18	3	27	26	50	12	20	403
GN 43-80-M16-200-E0-*	80	M 16	200	70	15	13	-	3	1.3	18	-	27	26	-	12	20	724
GN 43-80-M16-200-E3-*	80	M 16	200	70	15	13	-	3	1.3	18	3	27	26	-	12	20	754
GN 43-80-M16-200-G0-*	80	M 16	200	70	15	-	10.5	3	1.3	18	-	27	26	50	12	20	719
GN 43-80-M16-200-G3-*	80	M 16	200	70	15	-	10.5	3	1.3	18	3	27	26	50	12	20	746
GN 43-80-M16-250-E0-*	80	M 16	250	70	15	13	-	3	1.3	18	-	27	26	-	12	20	509
GN 43-80-M16-250-E3-*	80	M 16	250	70	15	13	-	3	1.3	18	3	27	26	-	12	20	539
GN 43-80-M16-250-G0-*	80	M 16	250	70	15	-	10.5	3	1.3	18	-	27	26	50	12	20	504
GN 43-80-M16-250-G3-*	80	M 16	250	70	15	-	10.5	3	1.3	18	3	27	26	50	12	20	531
GN 43-80-M20-75-E0-*	80	M 20	75	70	15	13	-	3	1.3	19	-	27	26	-	15	20	342
GN 43-80-M20-75-E3-*	80	M 20	75	70	15	13	-	3	1.3	19	3	27	26	-	15	20	368
GN 43-80-M20-75-G0-*	80	M 20	75	70	15	-	10.5	3	1.3	19	-	27	26	50	15	20	336
GN 43-80-M20-75-G3-*	80	M 20	75	70	15	-	10.5	3	1.3	19	3	27	26	50	15	20	357
GN 43-80-M20-100-E0-*	80	M 20	100	70	15	13	-	3	1.3	19	-	27	26	-	15	20	401
GN 43-80-M20-100-E3-*	80	M 20	100	70	15	13	-	3	1.3	19	3	27	26	-	15	20	427
GN 43-80-M20-100-G0-*	80	M 20	100	70	15	-	10.5	3	1.3	19	-	27	26	50	15	20	395
GN 43-80-M20-100-G3-*	80	M 20	100	70	15	-	10.5	3	1.3	19	3	27	26	50	15	20	416
GN 43-80-M20-125-E0-*	80	M 20	125	70	15	13	-	3	1.3	19	-	27	26	-	15	20	451
GN 43-80-M20-125-E3-*	80	M 20	125	70	15	13	-	3	1.3	19	3	27	26	-	15	20	477
GN 43-80-M20-125-G0-*	80	M 20	125	70	15	-	10.5	3	1.3	19	-	27	26	50	15	20	445
GN 43-80-M20-125-G3-*	80	M 20	125	70	15	-	10.5	3	1.3	19	3	27	26	50	15	20	466
GN 43-80-M20-150-E0-*	80	M 20	150	70	15	13	-	3	1.3	19	-	27	26	-	15	20	502
GN 43-80-M20-150-E3-*	80	M 20	150	70	15	13	-	3	1.3	19	3	27	26	-	15	20	528
GN 43-80-M20-150-G0-*	80	M 20	150	70	15	-	10.5	3	1.3	19	-	27	26	50	15	20	496
GN 43-80-M20-150-G3-*	80	M 20	150	70	15	-	10.5	3	1.3	19	3	27	26	50	15	20	517

Weight Version T




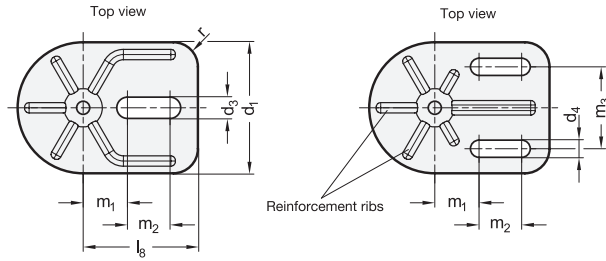

Type E0



Type G0






Type E3



Rubber pad vulcanized

Type G3




* Complete with version of the Leveling feet (Wrench flat at the bottom)

T without nut
TK with nut

GN 43-T/TK

Description	d1	d2	l1	l8	r	d3	d4	h1	h2	h4	h6	m1	m2	m3	A/F 2	Static Load in kN	⚖️
GN 43-80-M20-200-E0-*	80	M20	200	70	15	13	-	3	1.3	19	-	27	26	-	15	20	602
GN 43-80-M20-200-E3-*	80	M20	200	70	15	13	-	3	1.3	19	3	27	26	-	15	20	628
GN 43-80-M20-200-G0-*	80	M20	200	70	15	-	10.5	3	1.3	19	-	27	26	50	15	20	596
GN 43-80-M20-200-G3-*	80	M20	200	70	15	-	10.5	3	1.3	19	3	27	26	50	15	20	617
GN 43-80-M20-250-E0-*	80	M20	250	70	15	13	-	3	1.3	19	-	27	26	-	15	20	702
GN 43-80-M20-250-E3-*	80	M20	250	70	15	13	-	3	1.3	19	3	27	26	-	15	20	728
GN 43-80-M20-250-G0-*	80	M20	250	70	15	-	10.5	3	1.3	19	-	27	26	50	15	20	696
GN 43-80-M20-250-G3-*	80	M20	250	70	15	-	10.5	3	1.3	19	3	27	26	50	15	20	718
GN 43-80-M24-100-E0-*	80	M24	100	70	15	13	-	3	1.3	22	-	27	26	-	19	22	509
GN 43-80-M24-100-E3-*	80	M24	100	70	15	13	-	3	1.3	22	3	27	26	-	19	22	560
GN 43-80-M24-100-G0-*	80	M24	100	70	15	-	10.5	3	1.3	22	-	27	26	50	19	22	503
GN 43-80-M24-100-G3-*	80	M24	100	70	15	-	10.5	3	1.3	22	3	27	26	50	19	22	527
GN 43-80-M24-125-E0-*	80	M24	125	70	15	13	-	3	1.3	22	-	27	26	-	19	22	589
GN 43-80-M24-125-E3-*	80	M24	125	70	15	13	-	3	1.3	22	3	27	26	-	19	22	640
GN 43-80-M24-125-G0-*	80	M24	125	70	15	-	10.5	3	1.3	22	-	27	26	50	19	22	583
GN 43-80-M24-125-G3-*	80	M24	125	70	15	-	10.5	3	1.3	22	3	27	26	50	19	22	607
GN 43-80-M24-150-E0-*	80	M24	150	70	15	13	-	3	1.3	22	-	27	26	-	19	22	655
GN 43-80-M24-150-E3-*	80	M24	150	70	15	13	-	3	1.3	22	3	27	26	-	19	22	706
GN 43-80-M24-150-G0-*	80	M24	150	70	15	-	10.5	3	1.3	22	-	27	26	50	19	22	649
GN 43-80-M24-150-G3-*	80	M24	150	70	15	-	10.5	3	1.3	22	3	27	26	50	19	22	673
GN 43-80-M24-200-E0-*	80	M24	200	70	15	13	-	3	1.3	22	-	27	26	-	19	22	801
GN 43-80-M24-200-E3-*	80	M24	200	70	15	13	-	3	1.3	22	3	27	26	-	19	22	852
GN 43-80-M24-200-G0-*	80	M24	200	70	15	-	10.5	3	1.3	22	-	27	26	50	19	22	795
GN 43-80-M24-200-G3-*	80	M24	200	70	15	-	10.5	3	1.3	22	3	27	26	50	19	22	819
GN 43-80-M24-300-E0-*	80	M24	300	70	15	13	-	3	1.3	22	-	27	26	-	19	22	1971
GN 43-80-M24-300-E3-*	80	M24	300	70	15	13	-	3	1.3	22	3	27	26	-	19	22	2022
GN 43-80-M24-300-G0-*	80	M24	300	70	15	-	10.5	3	1.3	22	-	27	26	50	19	22	1965
GN 43-80-M24-300-G3-*	80	M24	300	70	15	-	10.5	3	1.3	22	3	27	26	50	19	22	1989

Weight Version T

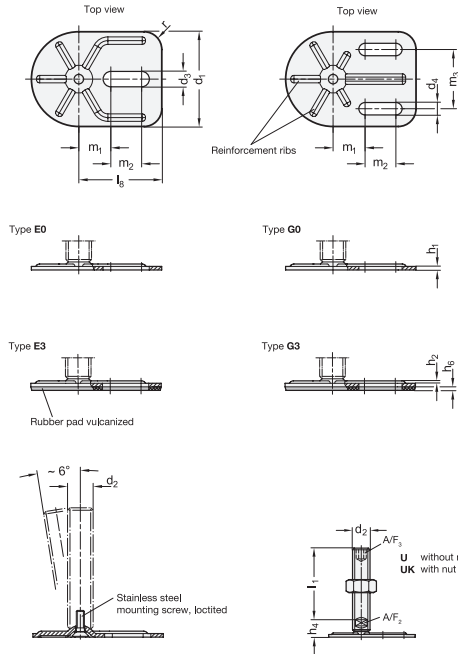

* Complete with version of the Leveling feet
(Hex socket at the top / Wrench at the bottom)

U without nut
UK with nut

GN 43-U/UK








Description	d1	d2	l1	l8	r	d3	d4	h1	h2	h4	h6	m1	m2	m3	A/F 2	A/F 3	Static Load in kN	⚖
GN 43-80-M16-75-E0-*	80	M 16	75	70	15	13	-	3	1.3	18	-	27	26	-	12	8	20	279
GN 43-80-M16-75-E3-*	80	M 16	75	70	15	13	-	3	1.3	18	3	27	26	-	12	8	20	309
GN 43-80-M16-75-G0-*	80	M 16	75	70	15	-	10.5	3	1.3	18	-	27	26	50	12	8	20	274
GN 43-80-M16-75-G3-*	80	M 16	75	70	15	-	10.5	3	1.3	18	3	27	26	50	12	8	20	301
GN 43-80-M16-100-E0-*	80	M 16	100	70	15	13	-	3	1.3	18	-	27	26	-	12	8	20	311
GN 43-80-M16-100-E3-*	80	M 16	100	70	15	13	-	3	1.3	18	3	27	26	-	12	8	20	341
GN 43-80-M16-100-G0-*	80	M 16	100	70	15	-	10.5	3	1.3	18	-	27	26	50	12	8	20	306
GN 43-80-M16-100-G3-*	80	M 16	100	70	15	-	10.5	3	1.3	18	3	27	26	50	12	8	20	333
GN 43-80-M16-125-E0-*	80	M 16	125	70	15	13	-	3	1.3	18	-	27	26	-	12	8	20	344
GN 43-80-M16-125-E3-*	80	M 16	125	70	15	13	-	3	1.3	18	3	27	26	-	12	8	20	374
GN 43-80-M16-125-G0-*	80	M 16	125	70	15	-	10.5	3	1.3	18	-	27	26	50	12	8	20	339
GN 43-80-M16-125-G3-*	80	M 16	125	70	15	-	10.5	3	1.3	18	3	27	26	50	12	8	20	366
GN 43-80-M16-150-E0-*	80	M 16	150	70	15	13	-	3	1.3	18	-	27	26	-	12	8	20	376
GN 43-80-M16-150-E3-*	80	M 16	150	70	15	13	-	3	1.3	18	3	27	26	-	12	8	20	406
GN 43-80-M16-150-G0-*	80	M 16	150	70	15	-	10.5	3	1.3	18	-	27	26	50	12	8	20	371
GN 43-80-M16-150-G3-*	80	M 16	150	70	15	-	10.5	3	1.3	18	3	27	26	50	12	8	20	398
GN 43-80-M16-200-E0-*	80	M 16	200	70	15	13	-	3	1.3	18	-	27	26	-	12	8	20	442
GN 43-80-M16-200-E3-*	80	M 16	200	70	15	13	-	3	1.3	18	3	27	26	-	12	8	20	472
GN 43-80-M16-200-G0-*	80	M 16	200	70	15	-	10.5	3	1.3	18	-	27	26	50	12	8	20	437
GN 43-80-M16-200-G3-*	80	M 16	200	70	15	-	10.5	3	1.3	18	3	27	26	50	12	8	20	464
GN 43-80-M16-250-E0-*	80	M 16	250	70	15	13	-	3	1.3	18	-	27	26	-	12	8	20	508
GN 43-80-M16-250-E3-*	80	M 16	250	70	15	13	-	3	1.3	18	3	27	26	-	12	8	20	538
GN 43-80-M16-250-G0-*	80	M 16	250	70	15	-	10.5	3	1.3	18	-	27	26	50	12	8	20	502
GN 43-80-M16-250-G3-*	80	M 16	250	70	15	-	10.5	3	1.3	18	3	27	26	50	12	8	20	530
GN 43-80-M20-75-E0-*	80	M 20	75	70	15	13	-	3	1.3	19	-	27	26	-	15	10	20	342
GN 43-80-M20-75-E3-*	80	M 20	75	70	15	13	-	3	1.3	19	3	27	26	-	15	10	20	368
GN 43-80-M20-75-G0-*	80	M 20	75	70	15	-	10.5	3	1.3	19	-	27	26	50	15	10	20	336
GN 43-80-M20-75-G3-*	80	M 20	75	70	15	-	10.5	3	1.3	19	3	27	26	50	15	10	20	357
GN 43-80-M20-100-E0-*	80	M 20	100	70	15	13	-	3	1.3	19	-	27	26	-	15	10	20	580
GN 43-80-M20-100-E3-*	80	M 20	100	70	15	13	-	3	1.3	19	3	27	26	-	15	10	20	606
GN 43-80-M20-100-G0-*	80	M 20	100	70	15	-	10.5	3	1.3	19	-	27	26	50	15	10	20	574
GN 43-80-M20-100-G3-*	80	M 20	100	70	15	-	10.5	3	1.3	19	3	27	26	50	15	10	20	595
GN 43-80-M20-125-E0-*	80	M 20	125	70	15	13	-	3	1.3	19	-	27	26	-	15	10	20	443
GN 43-80-M20-125-E3-*	80	M 20	125	70	15	13	-	3	1.3	19	3	27	26	-	15	10	20	469
GN 43-80-M20-125-G0-*	80	M 20	125	70	15	-	10.5	3	1.3	19	-	27	26	50	15	10	20	437
GN 43-80-M20-125-G3-*	80	M 20	125	70	15	-	10.5	3	1.3	19	3	27	26	50	15	10	20	458
GN 43-80-M20-150-E0-*	80	M 20	150	70	15	13	-	3	1.3	19	-	27	26	-	15	10	20	501
GN 43-80-M20-150-E3-*	80	M 20	150	70	15	13	-	3	1.3	19	3	27	26	-	15	10	20	527
GN 43-80-M20-150-G0-*	80	M 20	150	70	15	-	10.5	3	1.3	19	-	27	26	50	15	10	20	495
GN 43-80-M20-150-G3-*	80	M 20	150	70	15	-	10.5	3	1.3	19	3	27	26	50	15	10	20	516

Weight Version U





Leveling elements 11

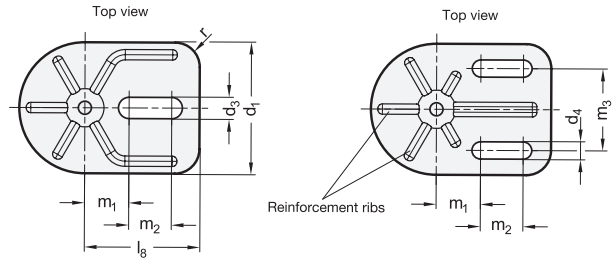


* Complete with version of the Leveling feet (Hex socket at the top / Wrench at the bottom)

U without nut **UK** with nut


GN 43-U/UK

Description	d1	d2	l1	l8	r	d3	d4	h1	h2	h4	h6	m1	m2	m3	A/F 2	A/F 3	Static Load in kN	⚖
GN 43-80-M20-200-E0-*	80	M20	200	70	15	13	-	3	1.3	19	-	27	26	-	15	10	20	596
GN 43-80-M20-200-E3-*	80	M20	200	70	15	13	-	3	1.3	19	3	27	26	-	15	10	20	622
GN 43-80-M20-200-G0-*	80	M20	200	70	15	-	10.5	3	1.3	19	-	27	26	50	15	10	20	590
GN 43-80-M20-200-G3-*	80	M20	200	70	15	-	10.5	3	1.3	19	3	27	26	50	15	10	20	611
GN 43-80-M20-250-E0-*	80	M20	250	70	15	13	-	3	1.3	19	-	27	26	-	15	10	20	697
GN 43-80-M20-250-E3-*	80	M20	250	70	15	13	-	3	1.3	19	3	27	26	-	15	10	20	723
GN 43-80-M20-250-G0-*	80	M20	250	70	15	-	10.5	3	1.3	19	-	27	26	50	15	10	20	691
GN 43-80-M20-250-G3-*	80	M20	250	70	15	-	10.5	3	1.3	19	3	27	26	50	15	10	20	713
GN 43-80-M24-100-E0-*	80	M24	100	70	15	13	-	3	1.3	22	-	27	26	-	19	12	22	572
GN 43-80-M24-100-E3-*	80	M24	100	70	15	13	-	3	1.3	22	3	27	26	-	19	12	22	623
GN 43-80-M24-100-G0-*	80	M24	100	70	15	-	10.5	3	1.3	22	-	27	26	50	19	12	22	566
GN 43-80-M24-100-G3-*	80	M24	100	70	15	-	10.5	3	1.3	22	3	27	26	50	19	12	22	590
GN 43-80-M24-125-E0-*	80	M24	125	70	15	13	-	3	1.3	22	-	27	26	-	19	12	22	564
GN 43-80-M24-125-E3-*	80	M24	125	70	15	13	-	3	1.3	22	3	27	26	-	19	12	22	615
GN 43-80-M24-125-G0-*	80	M24	125	70	15	-	10.5	3	1.3	22	-	27	26	50	19	12	22	558
GN 43-80-M24-125-G3-*	80	M24	125	70	15	-	10.5	3	1.3	22	3	27	26	50	19	12	22	582
GN 43-80-M24-150-E0-*	80	M24	150	70	15	13	-	3	1.3	22	-	27	26	-	19	12	22	645
GN 43-80-M24-150-E3-*	80	M24	150	70	15	13	-	3	1.3	22	3	27	26	-	19	12	22	696
GN 43-80-M24-150-G0-*	80	M24	150	70	15	-	10.5	3	1.3	22	-	27	26	50	19	12	22	639
GN 43-80-M24-150-G3-*	80	M24	150	70	15	-	10.5	3	1.3	22	3	27	26	50	19	12	22	663
GN 43-80-M24-200-E0-*	80	M24	200	70	15	13	-	3	1.3	22	-	27	26	-	19	12	22	781
GN 43-80-M24-200-E3-*	80	M24	200	70	15	13	-	3	1.3	22	3	27	26	-	19	12	22	832
GN 43-80-M24-200-G0-*	80	M24	200	70	15	-	10.5	3	1.3	22	-	27	26	50	19	12	22	420
GN 43-80-M24-200-G3-*	80	M24	200	70	15	-	10.5	3	1.3	22	3	27	26	50	19	12	22	799
GN 43-80-M24-300-E0-*	80	M24	300	70	15	13	-	3	1.3	22	-	27	26	-	19	12	22	1590
GN 43-80-M24-300-E3-*	80	M24	300	70	15	13	-	3	1.3	22	3	27	26	-	19	12	22	1641
GN 43-80-M24-300-G0-*	80	M24	300	70	15	-	10.5	3	1.3	22	-	27	26	50	19	12	22	1229
GN 43-80-M24-300-G3-*	80	M24	300	70	15	-	10.5	3	1.3	22	3	27	26	50	19	12	22	1608

Weight Version U

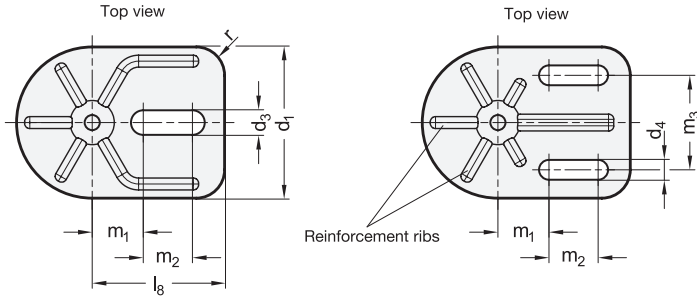


Type E0



Type G0





Type E3




Rubber pad vulcanized

Type G3



Stainless steel mounting screw, loctited



* Complete with version of Leveling feet
(External hex socket on the top / Wrench flat at the bottom)


V without nut VK with nut

GN 43-V/VK


Description	d1	d2	l2	l8	r	d3	d4	h1	h2	h5	h6	m1	m2	m3	A/F 4	A/F 5	Static Load in kN	⚖️
GN 43-80-M16-75-E0-*	80	M16	75	70	15	13	-	3	1.3	15	-	27	26	-	10	12	20	275
GN 43-80-M16-75-E3-*	80	M16	75	70	15	13	-	3	1.3	15	3	27	26	-	10	12	20	305
GN 43-80-M16-75-G0-*	80	M16	75	70	15	-	10.5	3	1.3	15	-	27	26	50	10	12	20	270
GN 43-80-M16-75-G3-*	80	M16	75	70	15	-	10.5	3	1.3	15	3	27	26	50	10	12	20	297
GN 43-80-M16-100-E0-*	80	M16	100	70	15	13	-	3	1.3	15	-	27	26	-	10	12	20	309
GN 43-80-M16-100-E3-*	80	M16	100	70	15	13	-	3	1.3	15	3	27	26	-	10	12	20	339
GN 43-80-M16-100-G0-*	80	M16	100	70	15	-	10.5	3	1.3	15	-	27	26	50	10	12	20	304
GN 43-80-M16-100-G3-*	80	M16	100	70	15	-	10.5	3	1.3	15	3	27	26	50	10	12	20	331
GN 43-80-M16-125-E0-*	80	M16	125	70	15	13	-	3	1.3	15	-	27	26	-	10	12	20	341
GN 43-80-M16-125-E3-*	80	M16	125	70	15	13	-	3	1.3	15	3	27	26	-	10	12	20	371
GN 43-80-M16-125-G0-*	80	M16	125	70	15	-	10.5	3	1.3	15	-	27	26	50	10	12	20	336
GN 43-80-M16-125-G3-*	80	M16	125	70	15	-	10.5	3	1.3	15	3	27	26	50	10	12	20	363
GN 43-80-M16-150-E0-*	80	M16	150	70	15	13	-	3	1.3	15	-	27	26	-	10	12	20	374
GN 43-80-M16-150-E3-*	80	M16	150	70	15	13	-	3	1.3	15	3	27	26	-	10	12	20	404
GN 43-80-M16-150-G0-*	80	M16	150	70	15	-	10.5	3	1.3	15	-	27	26	50	10	12	20	369
GN 43-80-M16-150-G3-*	80	M16	150	70	15	-	10.5	3	1.3	15	3	27	26	50	10	12	20	396

Weight Version V



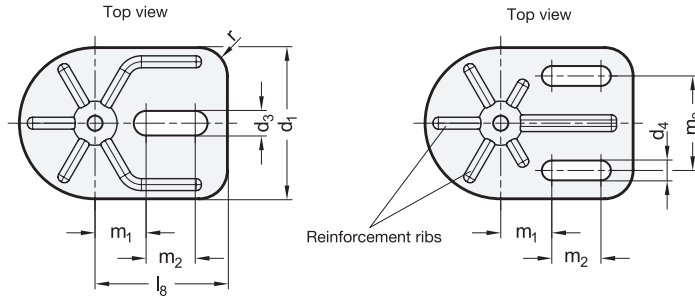


Type E0



Type G0





Type E3




Rubber pad vulcanized

Type G3




Stainless steel mounting screw, loctited



W with adjustable sleeve

GN 43-W

Description	d1	d2	l3	l8	r	d3	d4	d5	h1	h2	h6	l4	l5	l6	m1	m2	m3	A/F ₅	A/F ₆	Static Load in kN	⚖	
GN 43-80-M16-110-E0-W	80	M16	110	70	15	13	-	24	3	1.3	-	45	45	29	27	26	-	12	20	20	402	
GN 43-80-M16-110-E3-W	80	M16	110	70	15	13	-	24	3	1.3	3	45	45	29	27	26	-	12	20	20	432	
GN 43-80-M16-110-G0-W	80	M16	110	70	15	-	10.5	24	3	1.3	-	45	45	29	27	26	50	12	20	20	397	
GN 43-80-M16-110-G3-W	80	M16	110	70	15	-	10.5	24	3	1.3	3	45	45	29	27	26	50	12	20	20	424	
GN 43-80-M16-135-E0-W	80	M16	135	70	15	13	-	24	3	1.3	-	45	45	29	27	26	-	12	20	20	439	
GN 43-80-M16-135-E3-W	80	M16	135	70	15	13	-	24	3	1.3	3	45	45	29	27	26	-	12	20	20	469	
GN 43-80-M16-135-G0-W	80	M16	135	70	15	-	10.5	24	3	1.3	-	45	45	29	27	26	50	12	20	20	434	
GN 43-80-M16-135-G3-W	80	M16	135	70	15	-	10.5	24	3	1.3	3	45	45	29	27	26	50	12	20	20	461	
GN 43-80-M16-160-E0-W	80	M16	160	70	15	13	-	24	3	1.3	-	45	45	29	27	26	-	12	20	20	480	
GN 43-80-M16-160-E3-W	80	M16	160	70	15	13	-	24	3	1.3	3	45	45	29	27	26	-	12	20	20	510	
GN 43-80-M16-160-G0-W	80	M16	160	70	15	-	10.5	24	3	1.3	-	45	45	29	27	26	50	12	20	20	475	
GN 43-80-M16-160-G3-W	80	M16	160	70	15	-	10.5	24	3	1.3	3	45	45	29	27	26	50	12	20	20	502	
GN 43-80-M16-185-E0-W	80	M16	185	70	15	13	-	24	3	1.3	-	45	45	29	27	26	-	12	20	20	520	
GN 43-80-M16-185-E3-W	80	M16	185	70	15	13	-	24	3	1.3	3	45	45	29	27	26	-	12	20	20	550	
GN 43-80-M16-185-G0-W	80	M16	185	70	15	-	10.5	24	3	1.3	-	45	45	29	27	26	50	12	20	20	515	
GN 43-80-M16-185-G3-W	80	M16	185	70	15	-	10.5	24	3	1.3	3	45	45	29	27	26	50	12	20	20	542	

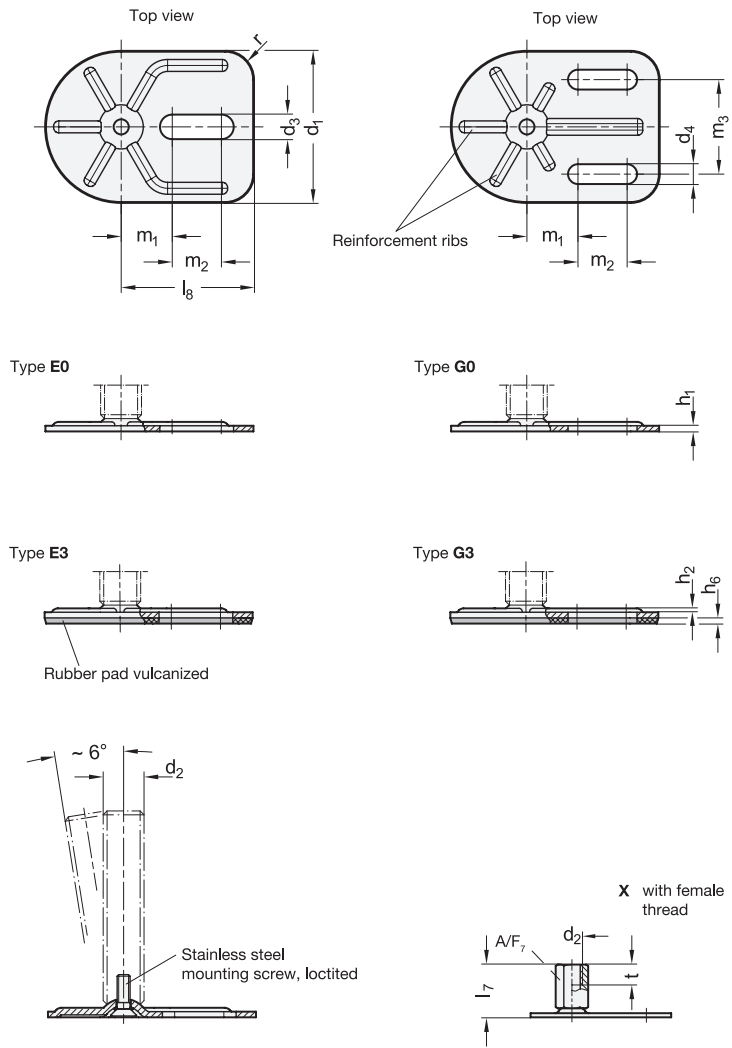

GN 43-X

Description	d1	d2	l7	l8	r	d3	d4	h1	h2	h6	m1	m2	m3	A/F 7	t	Static Load in kN	⚖️
GN 43-80-M8-26-E0-X	80	M 8	26	70	15	13	-	3	1.3	-	27	26	-	14	8	8	221
GN 43-80-M8-26-E3-X	80	M 8	26	70	15	13	-	3	1.3	3	27	26	-	14	8	8	224
GN 43-80-M8-26-G0-X	80	M 8	26	70	15	-	10.5	3	1.3	-	27	26	50	14	8	8	214
GN 43-80-M8-26-G3-X	80	M 8	26	70	15	-	10.5	3	1.3	3	27	26	50	14	8	8	219
GN 43-80-M10-29-E0-X	80	M 10	29	70	15	13	-	3	1.3	-	27	26	-	14	10	14	221
GN 43-80-M10-29-E3-X	80	M 10	29	70	15	13	-	3	1.3	3	27	26	-	14	10	14	224
GN 43-80-M10-29-G0-X	80	M 10	29	70	15	-	10.5	3	1.3	-	27	26	50	14	10	14	214
GN 43-80-M10-29-G3-X	80	M 10	29	70	15	-	10.5	3	1.3	3	27	26	50	14	10	14	219
GN 43-80-M12-32-E0-X	80	M 12	32	70	15	13	-	3	1.3	-	27	26	-	17	12	20	232
GN 43-80-M12-32-E3-X	80	M 12	32	70	15	13	-	3	1.3	3	27	26	-	17	12	20	242
GN 43-80-M12-32-G0-X	80	M 12	32	70	15	-	10.5	3	1.3	-	27	26	50	17	12	20	227
GN 43-80-M12-32-G3-X	80	M 12	32	70	15	-	10.5	3	1.3	3	27	26	50	17	12	20	234
GN 43-80-M16-38-E0-X	80	M 16	38	70	15	13	-	3	1.3	-	27	26	-	22	16	20	248
GN 43-80-M16-38-E3-X	80	M 16	38	70	15	13	-	3	1.3	3	27	26	-	22	16	20	278
GN 43-80-M16-38-G0-X	80	M 16	38	70	15	-	10.5	3	1.3	-	27	26	50	22	16	20	243
GN 43-80-M16-38-G3-X	80	M 16	38	70	15	-	10.5	3	1.3	3	27	26	50	22	16	20	269
GN 43-80-M20-45-E0-X	80	M 20	45	70	15	13	-	3	1.3	-	27	26	-	27	20	20	314
GN 43-80-M20-45-E3-X	80	M 20	45	70	15	13	-	3	1.3	3	27	26	-	27	20	20	339
GN 43-80-M20-45-G0-X	80	M 20	45	70	15	-	10.5	3	1.3	-	27	26	50	27	20	20	308
GN 43-80-M20-45-G3-X	80	M 20	45	70	15	-	10.5	3	1.3	3	27	26	50	27	20	20	329

