

## Clamping arm extenders with joint, for toggle clamps with forked clamping arm

### SPECIFICATION




Steel **ST**  
zinc plated, blue passivated

### INFORMATION


Clamping arm extenders GN 801.2 are used together with toggle clamps with "forked clamping arm" to clamp something simultaneously at two points in parallel, such as with clamping screws. These are mounted to the clamping arm and affixed in the desired position along the slot.

The side position of the clamping screws is adjusted via joints that enable any positioning of the spindle assemblies. A symmetrical arrangement/setting encourages a balanced clamping result.

All parts are supplied in a non-assembled set. Four flanged washers are included for fastening the clamping screw.

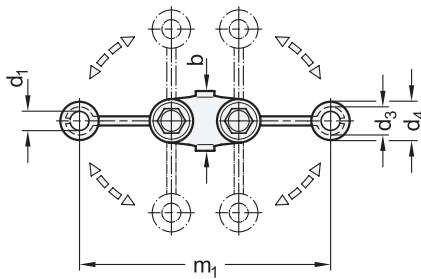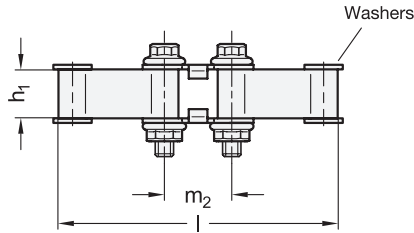

### Application example



### GN 801.2

Description	m1	h1	b	d1	d2	d3	d4	h2	m2	l	for toggle clamps		for toggle clamps	GN 860	⚖
											GN 810	GN 820			
GN 801.2-82-16-ST	82	16	19.5	6.2	M 6	9.2	12	37	22	91	130	GN 810.1 GN 810.3 GN 810.4	130	125	77
GN 801.2-100-18-ST	100	18	26	8	M 8	12	16	43	27	112	230	GN 820.1 GN 820.2 GN 820.3 GN 820.4	230	200	148