

## Stainless Steel- Positioning bushings

for indexing plungers / cam action indexing plungers

### SPECIFICATION



Stainless Steel AISI 431  
hardened

### INFORMATION


Stainless Steel-Positioning bushings GN 412.4 are used in connection with bolts of indexing plungers and cam action indexing plungers. The threads are adapted to the mounting blocks GN 412.1 (see page 814) and GN 612.1 (see page 815).

### TECHNICAL INFORMATION


- Stainless Steel characteristics (see page A26)



#### Assembly examples




Flat hexagon  
nut GN 909



Mounting block  
GN 412.1

#### Application example

Positioning bushing  
GN 412.4

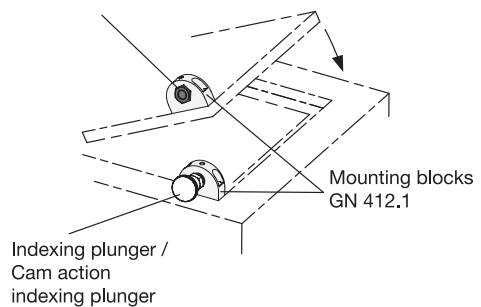

Indexing plunger /  
Cam action  
indexing plunger

### GN 412.4

STAINLESS STEEL

Description	d1	d2 +0.1	d3 -0.05	l1 -0.2	l2	A/F	⚖️
GN 412.4-M12x1,5-B4,2	M 12 x 1.5	B 4.2	12	10	13	13	9
GN 412.4-M12x1,5-B5,2	M 12 x 1.5	B 5.2	12	10	13	13	8
GN 412.4-M12x1,5-B6,2	M 12 x 1.5	B 6.2	12	10	13	13	7
GN 412.4-M16x1,5-B8,2	M 16 x 1.5	B 8.2	16	12	15	17	16
GN 412.4-M16x1,5-B10,2	M 16 x 1.5	B 10.2	16	12	15	17	13
GN 412.4-M16x1,5-B12,2	M 16 x 1.5	B 12.2	16	12	15	17	10